


NM 橡膠聯軸器

RUBBER COUPLINGS

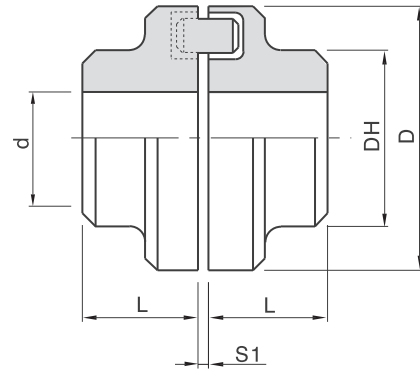

編號	孔徑 d		D	DH	L	普通負荷	最大負荷	容許公差	最高回轉速	重量 kg
	最小	最大								
NM 50	7	19	50	33	25	1.3	2.3	2.0	13.500	0.48
NM 67	8	28	67	46	30	2.2	4	2.5	10.000	1.02
NM 82	10	32	82	53	40	5.0	9	3.0	8.000	1.88
NM 97	12	42	97	69	50	10.5	19	3.0	7.000	3.54
NM 112	14	48	112	79	60	16.7	30	3.5	6.000	5.40
NM 128	18	55	128	90	70	26.7	48	3.5	5.000	8.10
NM 148	22	65	148	107	80	41.7	75	3.5	4.500	13.50
NM 168	28	75	168	124	88	69.5	125	3.5	4.000	19.30
NM 194	32	85	194	140	100	112.0	200	3.5	3.500	26.30
NM 214	45	95	214	157	112	167.0	300	4.0	3.000	35.70
NM 240	60	110	240	179	120	267.0	480	4.0	2.750	46.70
NM 265	70	120	265	198	140	417.0	750	5.5	2.500	66.30

型號	N900 R.P.M.		型號	N1200 R.P.M.		型號	N1800 R.P.M.		型號	N3600 R.P.M.	
	KW	HP		KW	HP		KW	HP		KW	HP
						67	0.06	0.06	67	0.12	0.12
						67	0.09	0.09	67	0.16	0.16
						67	0.12	0.12	67	0.25	0.25
						67	0.18	0.18	67	0.34	0.34
						67	0.25	0.25	67	0.5	0.5
						67	0.37	0.37	67	0.75	0.75
			67	0.3	0.5	67	0.55	0.55	67	1	1
			67	0.5	0.75	67	0.75	0.75	67	1.5	1.5
			67	0.7	1	67	1.1	1.1	67	2	2
			67	1.1	1.5	67	1.5	1.5	67	3	3
82	0.75	1	82	1.5	2	82	2.2	2.2	82	4	4
82	1.1	1.5				82	3	3			
82	1.5	2	82	2.2	3	82	4	4	82	5.5	5.5
97	2.2	3	97	3	4	97	5.5	5.5	97	7.5	7.5
									97	10	10
97	3	4	97	4	5.5	97	7.5	7.5			
			97	5.5	7.5						
112	4	5.5	112	7.5	10	112	11	11	112	15	15
112	5.5	7.5							112	20	20
112	7.5	10	128	11	15	112	15	15	112	25	25
						128	18.5	18.5	128	30	30
128	11	15	128	15	20	128	22	22			
148	15	20	148	18.5	25	148	30	30	128	40	40
			148	22	30				128	50	50
148	18.5	25				148	37	37			
168	22	30	168	30	40	168	45	45	148	61	61
168	30	40	168	37	50	168	55	55	148	75	75
194	37	50	194	45	61	194	75	75	168	100	100
194	45	61	194	55	75	194	90	90	168	122	122
194	55	75	194	75	100	194	110	110			
214	75	100	214	90	120	214	132	132			

RUBBER COUPLINGS